



Cat. No. 270-258

## Outdoor Connection Box


### Preparation for Mounting




◀ 1. Slide the cover off the back plate, then thread a drop cable through the center hole and attach it to the splitter's in-port.

2. If you have a two- or four-way splitter, attach the splitter's in-port to the bracket marked **2-WAY** or **4-WAY**. ▼


If you have a three-way splitter, attach the splitter's in-port to the bracket marked **3-WAY**. ▼



**Two-Way**




**Four-Way**




**Three-Way**

**Note:** If you have a four-way splitter with a center-port to center-port clearance of less than 1 inch, cut off the left arm of the bracket marked **3-WAY** before you attach the splitter. ▼





## Mounting the Back Plate and Splitter



◀ 1. To mount the back plate, drive one of the supplied screws into the mounting location through the slot at the top of the back plate.

▲ 2. To mount the splitter, drive the other supplied screws into the back plate and mounting location through the screw holes on the splitter.

3. Attach the remaining cables to the splitter's out-ports, then press the cables into the slots on the back plate's shelf. ▶

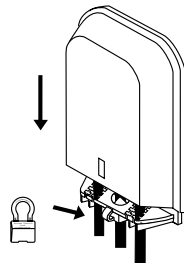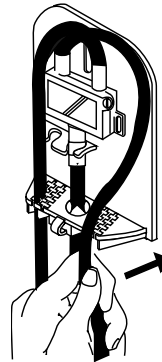

◀ 4. Slide the cover down over the back plate until it snaps in place over the locking tab. To secure the cover, you can attach one of the supplied box-locks through the locking tab.

Custom Assembled in the USA with Foreign and Domestic Components for RadioShack, A Division of Tandy Corporation, Fort Worth, TX 76102